

# DIRECT FLUSHING KIT

with Programmable Sensor

## WC03-043

The DVS Direct Flushing Kit comprises of the following components;

1x Programmable WC Sensor	1x M8 (Y splitter)
1x M8 3m Cable Extension	1x Air Break
1x 6v DC ASCO Valve	1x PSU

### PRODUCT NUMBER

WC03-043	Direct Flushing Kit
----------	---------------------

### TECHNICAL DATA

#### Programmable WC Sensor

Material	316 Stainless Steel
Surface finish	Brushed
Gross weight	0.2 kg
Operation type	A.I.R (Active Infrared) touch-free
Type of mounting	Wall mounted (Ø28mm drill hole required)
Adjustable settings	
Flush Type	Single
Flush Time	2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6 & 6.5 Seconds (Default 4)
Sensor range	1-3 (Default 2)
Anti Vandal time	1, 2, 4 & 8 mins (Default 1 minute)
Automatic purge	OFF, 3, 6, 12, 24, 36, 48 & 72 Hours (Default OFF)
Purge run time	2, 3, 3.5, 4, 4.5, 5, 5.5, 6 & 6.5 Seconds (Default OFF)
Lock Outs	OFF, 2-10 Ops (Default OFF)

#### ASCO Solenoid Valve

Material	ABS / brass
Voltage	6V DC
Power	6W
Orifice size	28mm
Pressure rating	0.35 - 6 bar
Operation	Latching



2019-08-21, Dart Valley Systems

## TECHNICAL DATA

PSU

Material	ABS
Surface finish	Matt black
Overall dimensions	73mm (l) 47mm (w) x 27mm (d)
Type of mounting	Pre-drilled fixing holes
Power input	100-240v / 50-60Hz 0.3A
Power output	6V / 2A


## ADDITIONAL INFORMATION

Programmable WC Sensor menu settings - Please see;  
AC01-001 Handheld Programmer Instructions


Product Codes;

Programmable WC Sensor	AC02-034
M8 Y Splitter	AT00-202
M8 3M Cable Extension	AT00-224
Air Break	WC00-098
6V ASCO Valve	AC17-015
PSU	AT00-029


Programmable WC Sensor

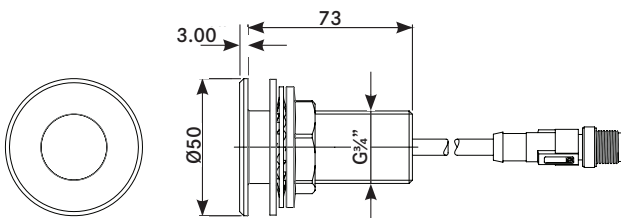

Mains PSU

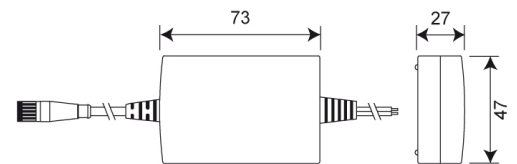

Air Break For Direct Flushing

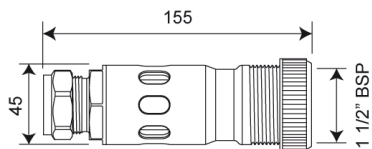

ALL DIMENSIONS IN MM

2019-08-21, Dart Valley Systems