

AQUARIUS WM STRAIGHT

Polished with Pex Hose

AT02-025

The Aquarius range incorporate simple and modern design, with the latest electronic functionality.

Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (Standard 5LPM, Other flow rates available)

Automatic purge function, Sensor range adjustment, Wave on/wave off function, Anti Vandal and Lock Out functions, Chlorination function.

Single mixed feed connection by PEX lined hose (15mm connection). External TMV required. Polished finish.


Requires a Station kit to operate. Station kits available in Single Station Battery or Mains Single Station, 2 Station or 3 Station for multiple connections. Refer to Station kit Data sheets.

PRODUCT NUMBER

AT02-025 Polished WM Straight no touch tap

TECHNICAL DATA

Type of tap	Aquarius WM Straight
Material	316 Stainless Steel
Surface finish	Polished
Gross weight	1.3 kg
Type of operation	No Touch Sensor
Type of mounting	Wall mounted
Type of mixing	Additional TMV may be required
Automatic purge	Yes* - Default: OFF
Purge run time	Options: 3, 6, 12, 24, 36 & 48 hours Default 1min*
Spout projection / Total tap length	Options: OFF, 30 secs, 1, 2, 4 & 8 mins 220mm / 250mm
Minimum flow pressure	1.00 bar (Lower pressure station kits available)
Volume flow rate at 3 bar	5LPM (Other flow rates available)
Adjustable run time	Yes* - Default: 2 secs
Water connection	Options: 2, 5, 10, 15, 20 & 30 secs 15mm PEX hose
Anti-Vandal function	Yes
Lock out function	Default OFF*
Chlorination function	Options: OFF, 4, 6, 8 & 10 operations Yes* - Default: 2 mins
Battery or mains station kit	Options: 1, 2, 3, 4, 5, 10, 20 & 30 mins Single Battery: AT00-001 Single Mains: AT00-002 - Other options available. Contact DVS.
Working pressure	1-10 Bar (For Low / High pressure. Contact DVS.)
Max working temperature	60°C
Fixing	3/4" BSP
Fixing length	Up to 30mm with flange nut

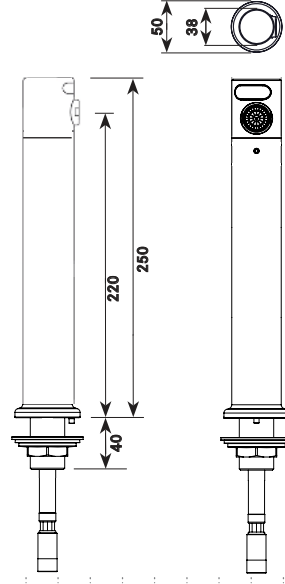

ALL DIMENSIONS IN MM

Last Updated: 2015-10-19, Dart Valley Systems



* (Set By Handheld Programmer)