

# AQUARIUS WM STRAIGHT

## Brushed with Copper Tails

### AT02-012

The Aquarius range incorporate simple and modern design, with the latest electronic functionality.


Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (Standard 5LPM, Other flow rates available)

Automatic purge function, Sensor range adjustment, Wave on/wave off function, Anti Vandal and Lock Out functions, Chlorination function.

Single mixed feed connection by Copper tail (10mm). External TMV required. Brushed finish.

**Requires a Station kit to operate. Station kits available in Single Station Battery or Mains Single Station, 2 Station or 3 Station for multiple connections. Refer to Station kit Data sheets.**

PRODUCT NUMBER	
AT02-012	Brushed WM Straight no touch tap
TECHNICAL DATA	
Type of tap	Aquarius WM Straight
Material	316 Stainless Steel
Surface finish	Brushed
Gross weight	1.15 kg
Type of operation	No Touch Sensor
Type of mounting	Wall mounted
Type of mixing	Additional TMV may be required
Automatic purge	Yes* - Default: OFF Options: 3, 6, 12, 24, 36 & 48 hours Default 1 min*
Purge run time	Options: OFF, 30 secs, 1, 2, 4 & 8 mins 170mm / 200mm
Spout projection / Total tap length	1.00 bar (Lower pressure station kits available) 5LPM (Other flow rates available) Yes* - Default: 2 secs
Minimum flow pressure	Options: 2, 5, 10, 15, 20, 30 secs 10mm Copper tails
Volume flow rate at 3 bar	Yes
Adjustable run time	Default OFF*
Water connection	Options: OFF, 4, 6, 8 & 10 operations Yes* - Default 2 mins
Anti-Vandal function	Options: 1, 2, 3, 4, 5, 10, 20 & 30 mins
Lock out function	Single Battery: AT00-001 Single Mains: AT00-002 - Other options available. Contact DVS.
Chlorination function	1-10 Bar (For Low / High pressure, Contact DVS.)
Battery or mains station kit	60 °C
Working pressure	¾" BSP
Max working temperature	Up to 30mm with flange nut
Fixing	
Fixing length	

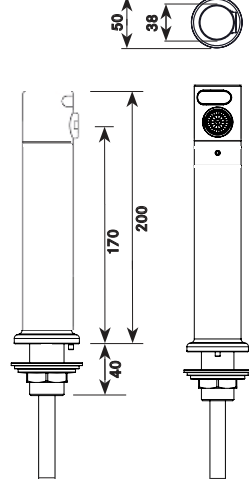

ALL DIMENSIONS IN MM

Last Updated: 2015-09-25, Dart Valley Systems



\* (Set By Handheld Programmer)